




PV Point Comfort

Automatic Backup Power Supply



PV Point Comfort

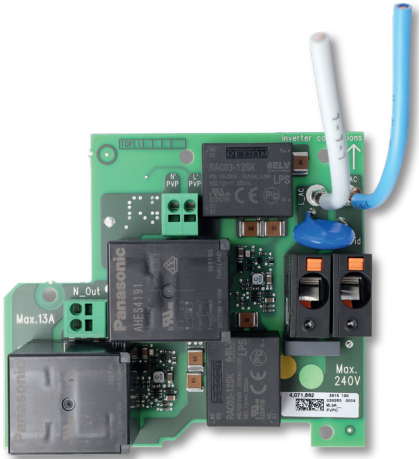

The **PV Point Comfort** provides a reliable power supply to dedicated outlets or small circuits —not just during outages, but also while the grid is up and running.

Unlike the standard PV Point, the PV Point Comfort automatically switches to backup power when needed, ensuring uninterrupted power for essential loads like refrigerators, freezers, or security systems. It's available as an accessory and can be easily retrofitted to the Fronius **Primo GEN24** or **Primo GEN24 Plus** inverter.

Dimensions (L* W)	Inches	4" * 4.7"
Product Weight	lbs	0,705
Weight incl. packaging	lbs	0,904
Receptacle Requirement		GFCI protected receptacle
Max. Current (continuous)	Aac	13
Max. Current (overload 5 seconds)	Aac	20
Voltage Output	Vac	120
Nom. Output in Backup Operation	W	1560
Permissible Wire Size		Stranded/Solid Copper 14 AWG

Find out more about the GEN24 and its backup power capabilities: www.fronius.us/gen24

Fronius USA LLC
6797 Fronius Drive
Portage, IN 46368
USA
pv-sales-usa@fronius.com
www.fronius.us

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales-austria@fronius.com
www.fronius.com

USA V02 Nov 2025
Text and illustrations were accurate at the time of printing. Fronius reserves the right to make changes. All information published in this document, despite exercising the greatest of care in its preparation, is subject to change. No legal liability is accepted. Copyright © 2025 Fronius™. All rights reserved.